

HOW TO REPLACE CONTROL PANEL (6 SPEED)

CAUTION: To avoid electrical shock make sure all power to the Kobe hood is dis-connected.




Recessed Control Switch





Level Control Switch

*There are two types of control switch assemblies, recessed and level, this instructional applies to both versions.

1. Disconnect the AC Power.
2. Remove baffle filters.

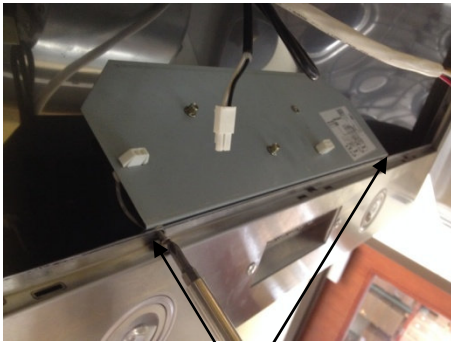

Step 3: Remove (2) screws holding panel in place. Pull panel loose to access the control panel. Note there are different panel designs and screw positions may vary.

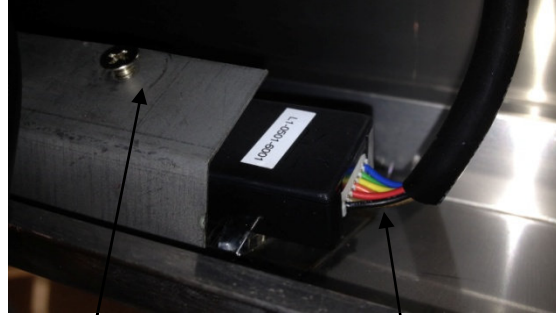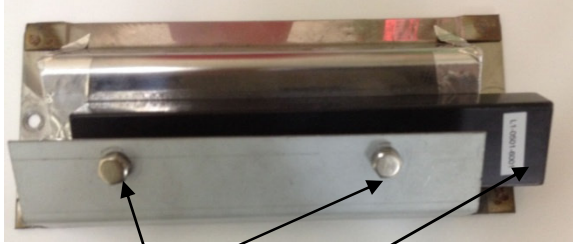

Loosen screws but do not remove to allow the control unit to slide out to the right. Remove plug from processor board. Replace old control unit with new control unit and reverse order of operation. When tightening the 2 screws to the back of the control unit make sure the control unit is properly secure before proceeding. Improperly securing the control unit will result in a loose control unit and push buttons not properly working.